


|  |                               |  |
|--|-------------------------------|--|
|  <p>BusCAM-20</p> | Current Consumption           | MAX:80mA                                     |
|  | Sensor                        | CMD-III, 1 / 4 "                             |
|  | Resolution (TV LINES)         | 480  |
|  | Minimum illumination          | 0 Lux  |
|  | Angle                         | 120°   |
|  | Effective Pixels              | 656*492                                      |
|  | TV System                     | NTSC   |
|  | Video output                  | Full color video out: 1. 0Vp-p 75 (ohm) load |
|  | Working Voltage               | DC9-16V                                      |
|  | Video Color                   | Full color                                   |
|  | IR Led                        | Yes,Night Vision,10M effective distance      |
|  | Water Proof                   | IP67-IP68                                    |
|  | Operating Temperature         | -30℃ to +70℃                                 |
|  | Parking guard line            | On or Off Switchable                         |
| Image  | Mirror, Non mirror Switchable |  |

Installation Instruction

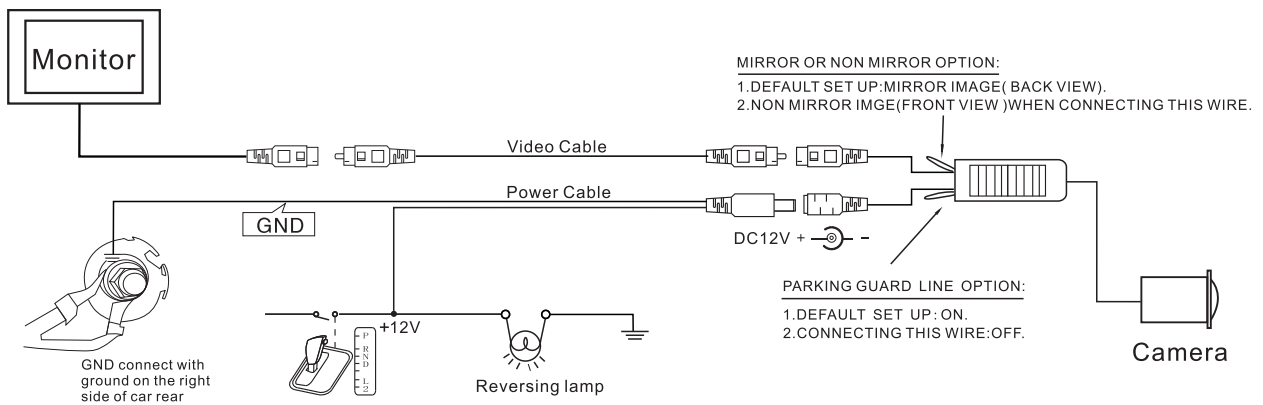

|  |                               |  |
|--|-------------------------------|--|
|  <p>BusCAM-20</p> | Current Consumption           | MAX:80mA                                     |
|  | Sensor                        | CMD-III, 1 / 4 "                             |
|  | Resolution (TV LINES)         | 480  |
|  | Minimum illumination          | 0 Lux  |
|  | Angle                         | 120°   |
|  | Effective Pixels              | 656*492                                      |
|  | TV System                     | NTSC   |
|  | Video output                  | Full color video out: 1. 0Vp-p 75 (ohm) load |
|  | Working Voltage               | DC9-16V                                      |
|  | Video Color                   | Full color                                   |
|  | IR Led                        | Yes,Night Vision,10M effective distance      |
|  | Water Proof                   | IP67-IP68                                    |
|  | Operating Temperature         | -30℃ to +70℃                                 |
|  | Parking guard line            | On or Off Switchable                         |
| Image  | Mirror, Non mirror Switchable |  |

Installation Instruction

