


Product specification



C1000N
Lip Mount

Current Consumption	MAX:80mA
Sensor	CMD-III, 1 / 4 "
Resolution(TV LINES)	480
Minimum illumination	0 Lux
Angle	120°
Effective Pixels	656*492
TV System	NTSC
Video output	Full color video out: 1. 0Vp-p 75 (ohm) load
Working Voltage	DC9-16V
Video Color	Full color
IR Led	Yes,Night Vision,10M effective distance
Water Proof	IP67-IP68
Operating Temperature	-30℃ to +70℃
Parking guard line	On or Off Switchable
Image	Mirror, Non mirror Switchable

Installation Instruction

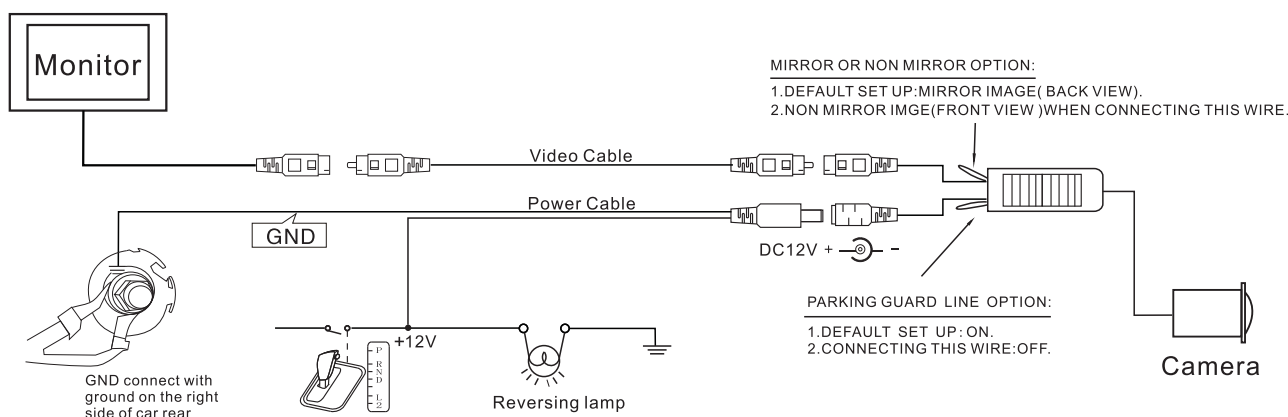

Product specification



C1000N
Lip Mount

Current Consumption	MAX:80mA
Sensor	CMD-III, 1 / 4 "
Resolution(TV LINES)	480
Minimum illumination	0 Lux
Angle	120°
Effective Pixels	656*492
TV System	NTSC
Video output	Full color video out: 1. 0Vp-p 75 (ohm) load
Working Voltage	DC9-16V
Video Color	Full color
IR Led	Yes,Night Vision,10M effective distance
Water Proof	IP67-IP68
Operating Temperature	-30℃ to +70℃
Parking guard line	On or Off Switchable
Image	Mirror, Non mirror Switchable

Installation Instruction

